


Steam Accessories



Aroma-Guard II peristaltic pump is designed to dispense low volumes of Eucalyptus or other approved fragrance. Installation is simple and start-up is simplified with a push-button primer. The *Aroma-Guard II* Series features an exclusive quick release twist-off head, built-in timer and a self-lubricating roller assembly. The *Aroma-Guard II* is also 7 day programmable to work during your commercial facility's hours of operation.

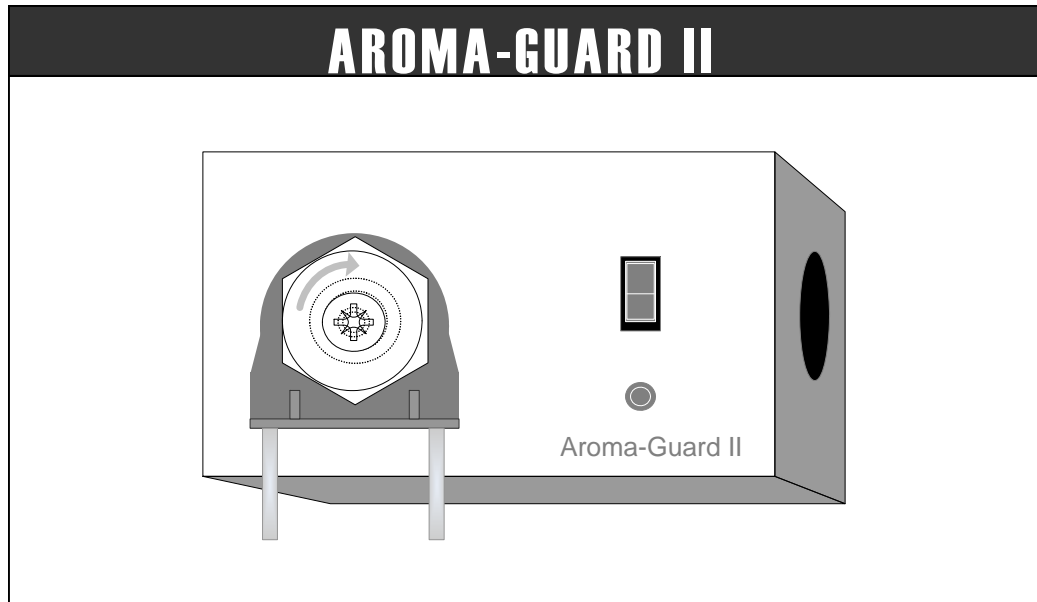

Steam Accessories



Most Complete Line of Commercial Steam Accessories

Scandia's Aroma-Guard II Performs pumping of essential oils such as eucalyptus, essential oils and organic fragrances. Handles viscosities to 1000 CPS. PVC injection fitting and strainer. Lubricated Neoprene/Polyethylene tubing is 7/16" O.D. x 1/4" I.D. with a broader chemical resistance than EPDM, Silicone, or Viton.


Complete Hardware Kit



(5 1/16" W x 8 1/2" L x 5 1/16" H.)

An all metal 120VAC gear-motor turns roller which moves fluid through tubing. ETL Approved. Replacement tubing is available (No. 1R422). Peristaltic Pump, Maximum Pressure 25 PSI, Maximum Feed Rate 0.83 GPH, Maximum Flow 20 GPD, Maximum Strokes per Minute 13, Volts 120, Suction Lift 15 Feet, Tubing Size Outside Diameter 7/16 Inch Inside Diameter 1/4 Inch, Width 5 1/6 Inches, Length 8 1/2 Inches, Height 5 1/6 Inches

Max. Flow (GPD)	20
Max. Pressure (PSI)	25
Max. Viscosity	15000 CPS
Voltage	115
Reproducibility (%)	+/-2
Turn Down Ratio	7.7:1
Motor RPM	14
Body Material	Polycarbonate
Number of Feeds	1
Power Cord	6 Ft
Min. Flow Rate (GPD)	2.6
Max. Flow (GPH)	0.83
cc/Min.	52.6
Standards	ETL, cETL, ETLsanitary, CE

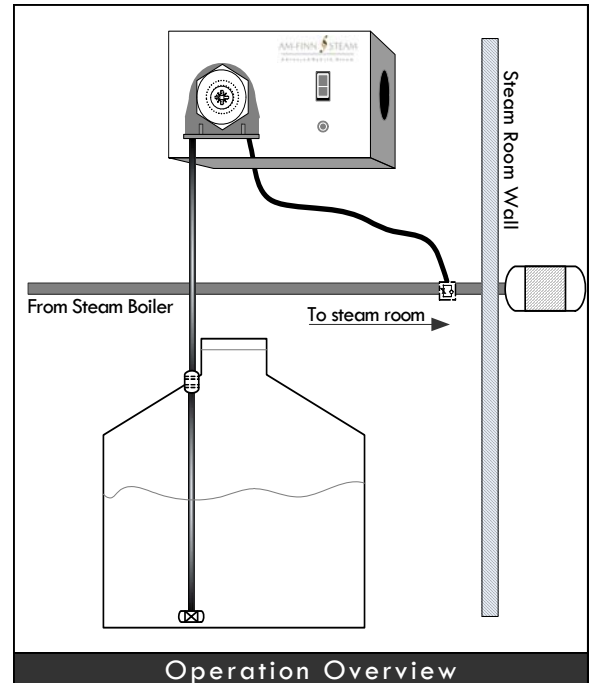

- **WARNING: Use only with nonflammable liquids compatible with pump component materials and in nonflammable/none explosive atmospheres.**



Certified Products



Government Approved