


Scandia POWERZONE 400 Settings Overview


The Scandia POWERZONE O3 Generator is to be placed outside of the steam room. The generator must be positioned in a location where it can be accessed In order to activate by maintenance and cleaning staff (NOT BY MEMBERS OR GUESTS). Common locations are utility/service rooms or above the modular steam room. The generator is to be activated manually by cleaning or maintenance staff on a daily basis. The POWERZONE 400 can be diss-activated by connecting it via a standard 120V 24 hour timer plug – similar to a lamp timer. Scheduled to turn on only during non-operating hours, therefore denying members to inadvertently activate the POWERZONE.

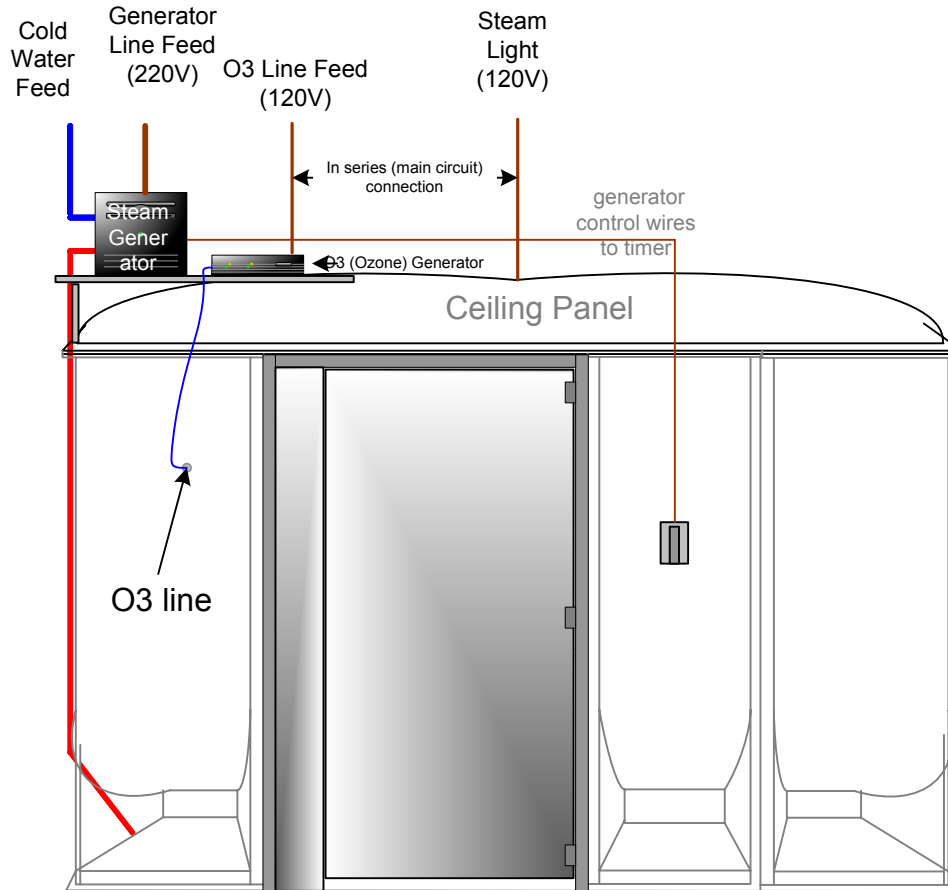

The POWERZONE O3 GENERATOR SHOULD ONLY BE ACTIVATED WHEN THE STEAM/SAUNA ROOM IS UNOCCUPIED. Activate the POWERZONE ONLY during a time when the STEAM/SAUNA room is closed to customers. At least thirty (30) minutes should laps before bathers return to the Steam/Sauna room. The timer should be checked weekly to ensure the appropriate time is set. Re-set the timer in the event of a power outage or any possible disruption of the power or possible alteration of the set on-time.

Room Size cu ft	Time setting minutes
200	10
250	15
300	20
350	25
400+	30

To activate the Powerzone generator press the O₃ button to turn on the unit. Press the Up or Down button to set time. Refer to the chart below to determine appropriate time.

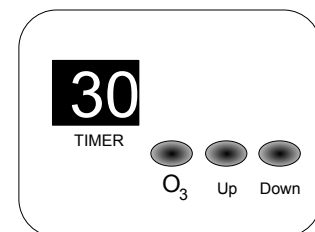

*
SCANDIA